





N

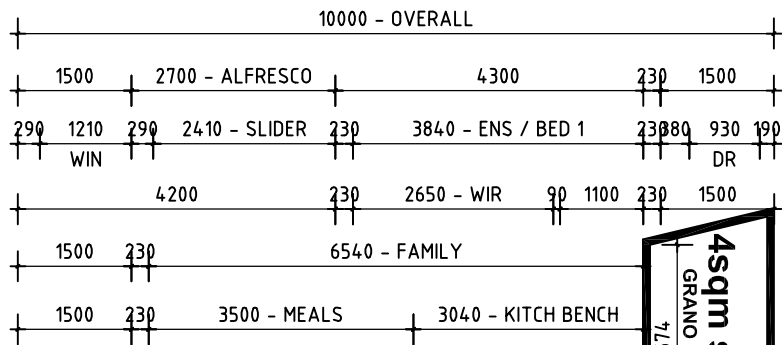

GENERAL NOTES:

1. THESE PLANS ARE THE PROPERTY OF THE BUILDER & MAY NOT BE REPRODUCED OR MODIFIED IN WHOLE OR PART WITHOUT PERMISSION. COPYRIGHT ACT 1968-1973.
2. ROOF TIE-DOWN IN ACCORDANCE WITH AS1684 CLAUSE 5.3.1.3. TIMBER ROOF FRAMING IN ACCORD. WITH AS1684.
3. VENTILATION IN ACCORD WITH THE SEWERAGE, LIGHTING, VENTILATION, & CONSTRUCTION REGULATIONS 1971 & AS1688.
4. ALL PRIMARY BUILDING ELEMENTS USED FOR THE CONSTRUCTION OF THIS BUILDING WILL BE CONSIST ENTIRELY OF, OR A COMBINATION OF, MATERIALS CONSIDERED NOT SUBJECT TO TERMITE ATTACK. SPECIFICALLY, ALL TIMBERS USED IN THIS DWELLING WILL BE PRESERVATIVE TREATED IN ACCORDANCE WITH AS 3660.1 AND WILL COMPLY WITH PART 3.1.3.2 OF THE BCA
5. THE BUILDER RESERVES THE RIGHT TO ALTER ANY DIMENSION ON SITE TO SUIT SITE CONDITIONS OR CONSTRUCTION NEEDS.
6. ANY WORKS INVOLVING SUCH ITEMS AS BUT NOT LIMITED TO SEWER, EARTHWORKS, RETAINING, DRAINAGE, & ENGINEERING SOLUTIONS, UNLESS OTHERWISE NOTED ON THE PLANS AND / OR SPECIFICATIONS ARE AT THE EXPENSE OF THE OWNER.
7. PLANS ARE TO BE READ IN CONJUNCTION WITH ANY SPECIFICATIONS, ENGINEERS DRAWINGS & ANY OTHER DOCUMENTATION FORMING PART OF THE CONTRACT.
8. DOWNPIPES TO ROOF SHALL BE CENTRED & LOCATED TO ROOF PLUMBERS DISCRETION.
9. FIX ALL FLASHING AND DAMP-PROOF-COURSES SHOWN, SPECIFIED, OR REQUIRED TO PREVENT RAINWATER ENTERING THE WORKS ON COMPLETION.
10. WHEN ADDING / ALTERING MATCH EXISTING DETAILS FINISHES & MATERIALS IN ALL RESPECTS UNLESS OTHERWISE SHOWN, SPECIFIED OR DIRECTED BY THE BUILDER.
11. ALL BUILDING & OTHER WORKS TO BE CARRIED OUT IN ACCORD. WITH THE BCA & OTHER RELEVANT STANDARDS, REGULATIONS, BY-LAWS & LOCAL LAWS OF ALL STATUTORY AUTHORITIES.
12. DO NOT SCALE FROM THESE DRAWINGS


NOTE: BUILDER TO CHECK DRAWINGS PRIOR TO COMMENCEMENT OF ANY WORK

UNIT 4 FLOOR PLAN
SCALE 1:100

UNIT 4 FLOOR AREAS	
LIVING AREA	133.50sqm
GARAGE	35.10sqm
PORCH	2.10sqm
ALFRESCO	9.50sqm
TOTAL FLR AREA 180.20sqm	
58%	

DOWNPIPE NOTE:
NUMBER & POSITION OF DOWNPIPES ARE SUGGESTED ONLY & ARE SUBJECT TO VARIATION BY PLUMBER ON SITE

WINDOW NOTE:
BUILDER TO CHECK WITH CLIENT ALL WINDOW TYPES BEFORE ORDERING & COSTING

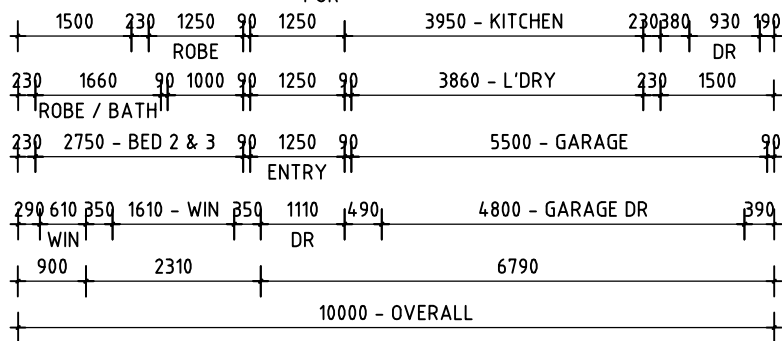


INSULATE CAVITY WALLS IN ACCORDANCE WITH ENERGY REPORT

INSULATION NOTE: BUILDER TO INCLUDE R4.0 INSULATION BATTS IN ACCORD WITH BCA THROUGHOUT ROOF SPACE

ENGINEER NOTE:
REFER ALL BEAM & LINTEL SIZES TO STRUCTURAL ENGINEERS DETAILS. THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH S.ENGINEERS DRAWINGS.

WALL FINISH NOTE: DIMENSIONS SHOWN ON PLAN ARE TO BRICKWORK ONLY, SIZES WILL VARY ONSITE, DUE TO ALLOWANCE FOR WALL FINISHES.

	Genesis Design Studio ABN: 39978062273 ARCHITECTURAL DESIGN & DRAFTING MOBILE: 0424 463 007 EMAIL: admin@genesids.com.au WEB: www.genesids.com.au		Designed By: E.R		Dwg No. 15				
			Date: SEPT 2022						
			Scale: 1:100						
		Plot Info: A3							
		FLOOR PLAN	© COPYRIGHT				R	Date	Description

FLOOR PLAN